DAEHWYA COMPREHENSIVE RICE MILL FACILITIES

RICE MILLING AND PROCESSING EQUIPMENT (CATALOG 2010)

















Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

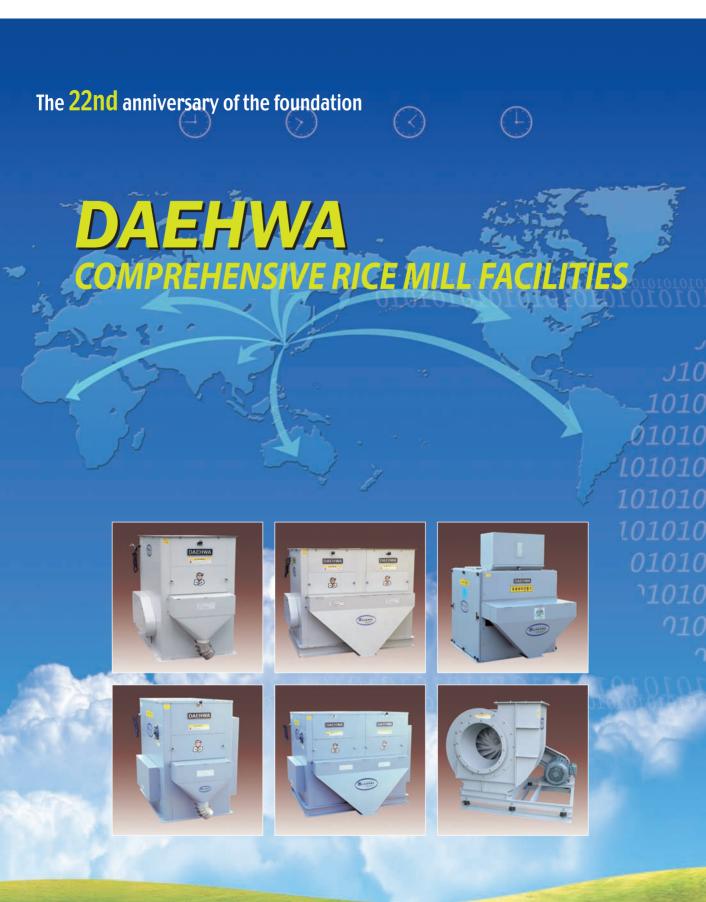




RICE MILL PLANT PROCESS FLOW CHART

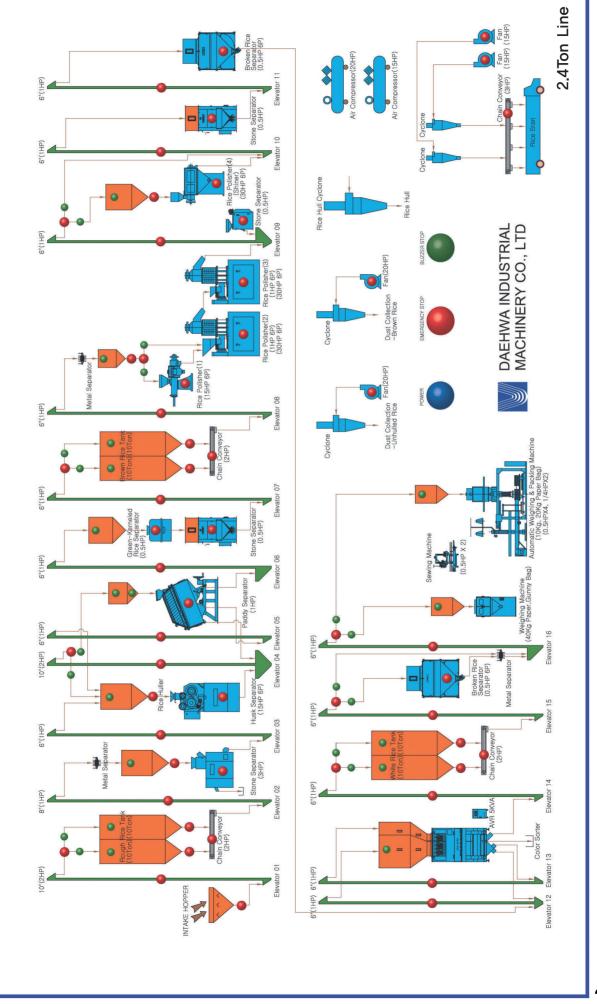

RICE MILL PLANT PROCESS FLOW CHART

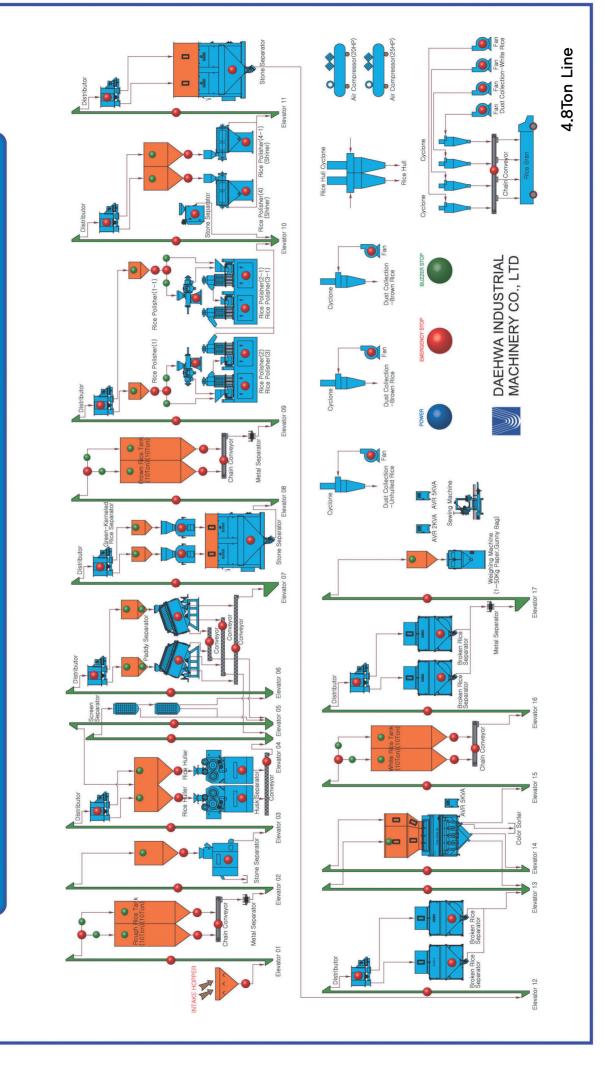

4.8Ton Line-A RICE MILL PLANT PROCESS FLOW CHART DAEHWA INDUSTRIAL MACHINERY CO., LTD **>**

Master of separating stones from brown rice and white rice

STONE SEPARATOR

Dolsoe(Home use)



Model : Dolsoe(Home use) Capacity : 0,6ton/h



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe(Home use) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble


Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

4. Built-in separator for dry grass and broken rice Dolsoe is ideal for the primary cleaning where straw, PP-threads, bran, broken rice are eliminated.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Stone Separator Dolsoe(Home use)	0.6ton/h	0.5hp	625mm	919mm	1130mm	85kg

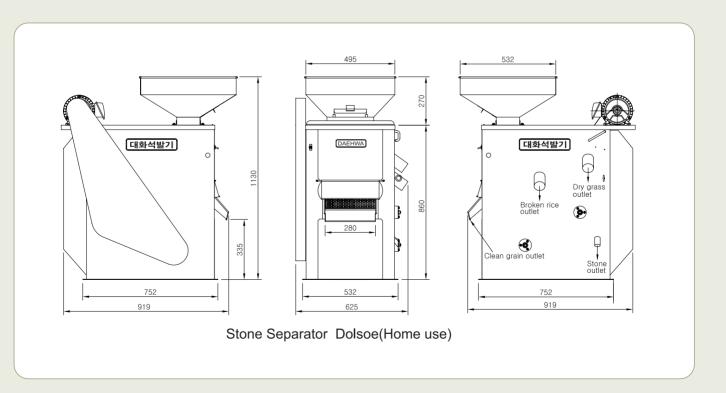

Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Master of separating stones from brown rice and white rice

STONE SEPARATOR

Dolsoe(Small)



Model : Dolsoe(Small)
Capacity : 2ton/h



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe(Small) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble

Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.


4. Ultra precise grinding axis

In order to maintain the accuracy of the rotating parts, the S45C grinding axis is adopted.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Stone Separator Dolsoe(Small)	2ton/h	0.5hp	670mm	850mm	836mm	96kg

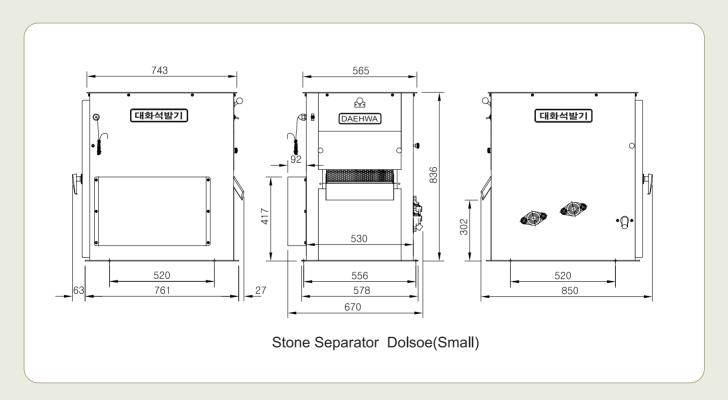

Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Master of separating stones from brown rice and white rice

STONE SEPARATOR

Dolsoe



Model: Dolsoe
Capacity: 3.5ton/h



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble

Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.


4. Ultra precise grinding axis

In order to maintain the accuracy of the rotating parts, the S45C grinding axis is adopted.





SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Stone Separator Dolsoe	3.5ton/h	0.5hp	767mm	1054mm	1008mm	140kg

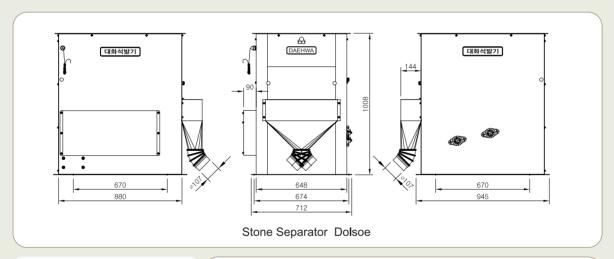







• Specifications are subject to change without notice for better performance.



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.com

Master of separating stones from brown rice and white rice

STONE SEPARATOR

Dolsoe II (Single)



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe II(Single) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble

Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

4. Ultra precise grinding axis


In order to maintain the accuracy of the rotating parts, the S45C grinding axis is adopted.

5. Built-in separator for dry grass and broken rice

Dolsoe is ideal for the primary cleaning where straw, PP threads, bran, broken rice are eliminated.

SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Stone Separator Dolsoe II(Single)	3.5ton/h	0.5hp	841mm	1277mm	1061mm	190kg

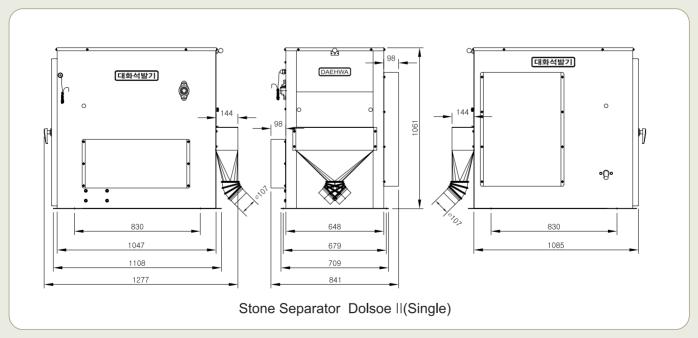

• Specifications are subject to change without notice for better performance.

DAEHWA

Model: Dolsoe II (Single) Capacity: 3,5ton/h



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com



Master of separating stones from brown rice and white rice

STONE SEPARATOR

Dolsoe (Double)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe (Double) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is sedimented while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble

Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.


4. Ultra precise grinding axis

In order to maintain the accuracy of the rotating parts, the S45C grinding axis is adopted.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Stone Separator Dolsoe(Double)	7ton/h	1hp	1408mm	1190mm	1108mm	285kg

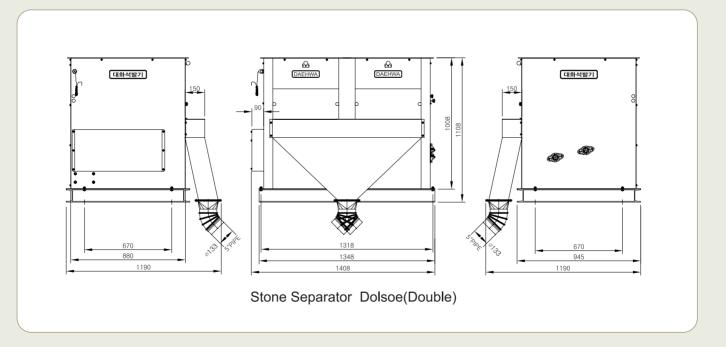

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Master of separating stones from brown rice and white rice

STONE SEPARATOR

Dolsoe II (Double)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DARIJWA INDIJATALA MARIJWERV AA LEA

Dolsoe II(Double) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is sedimented while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble

Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

4. Ultra precise grinding axis


In order to maintain the accuracy of the rotating parts, the S45C grinding axis is adopted.



Dolsoe is ideal for the primary cleaning where straw, PP threads, bran, broken rice are eliminated.

SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Stone Separator Dolsoe II (Double)	7ton/h	1hp	1474mm	1408mm	1161mm	370kg

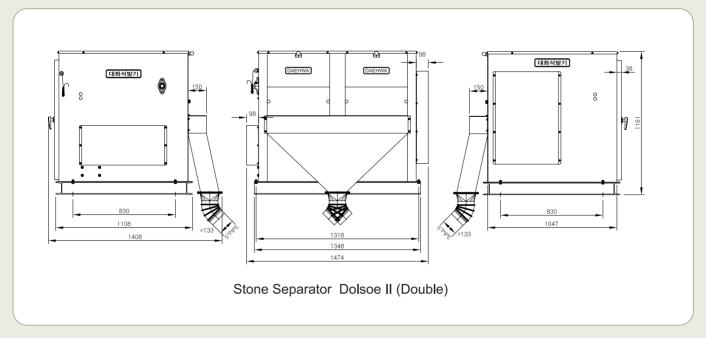

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.com





Master of separating stones from paddy rice

COMPREHENSIVE

STONE SEPARATOR

Dolsoe(40B)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Dolsoe(40B) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble


Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

4. Built-in dust aspirator

SPECIFICATIONS



Model	Capacity	Power	Width	Length	Height
Stone Separator Dolsoe(40B)	2ton/h	2hp	1025mm	1529mm	1935mm

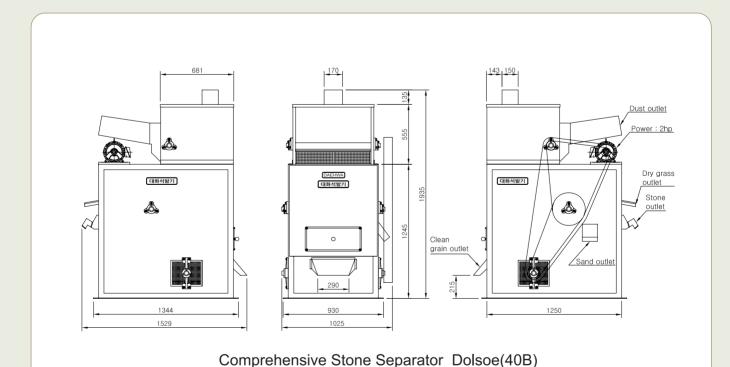

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Master of separating stones from paddy rice

COMPREHENSIVE

STONE SEPARATOR

Dolsoe(45B)



Model: Dolsoe (45B) Capacity: 3ton/h



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe(45B) completely eliminates stones and dusts

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble


Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

4. Built-in dust aspirator

Model: Dolsoe (45B) Capacity: 3ton/h

SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Stone Separator Dolsoe(45B)	3ton/h	3hp	1160mm	1800mm	2040mm

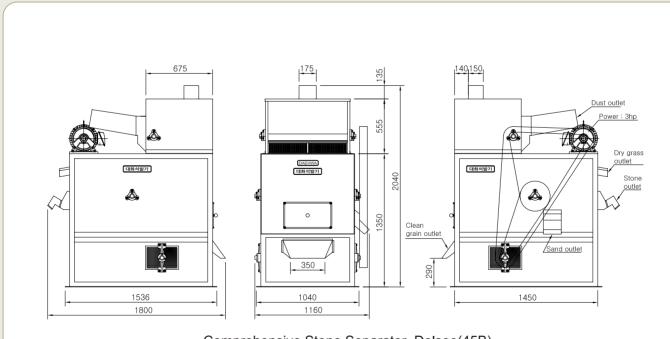

Comprehensive Stone Separator Dolsoe(45B)



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

• Specifications are subject to change without notice for better performance.

Master of separating stones from paddy rice

COMPREHENSIVE

STONE SEPARATOR

Dolsoe(60B)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Dolsoe(60B) completely eliminates stones and dusts.

FEATURES

1. Excellent screening rate

Dolsoe is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. Air circulation method

Dust is settled while air is circulating inside the machine, so dust does not come out of it.

3. Free from mechanical trouble


Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

4. Built-in dust aspirator

SPECIFICATIONS

QA4W7
Model: Dolsoe (60B) Capacity: 3,5-4ton/h

Model	Capacity	Power	Width	Length	Height
Stone Separator Dolsoe(60B)	3.5~4ton/h	2hp/5hp	1410mm	2095mm	2400mm

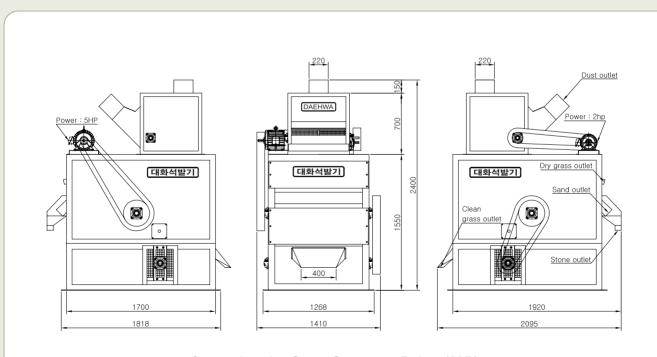

Comprehensive Stone Separator Dolsoe(60B)



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

• Specifications are subject to change without notice for better performance.

Master of separating stones from paddy rice

COMPREHENSIVE

STONE SEPARATOR

Dolsoe(ISPC-60)






Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAETWA INDUSTRIAL MACHINERY CO., LTD.

Dolsoe(ISPC-60) completely eliminates stones and dusts


FEATURES

- 1. No need for a support when installing the stone separator.
- 2. Dolsoe(ISPC-60) adopts a method of floating and absorbing with a specially designed screen of an excellent screening capacity, low energy consumption and high efficiency.
- 3. The vacuum state inside the machine keeps it clean, and free from grains and dusts.
- 4. Excellent screen performance against dust and smut.
- 5. The screen mat and frame can be easily replaced. Grain does not leak through the stone outlet



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Stone Separator Dolsoe(ISPC-60)	6~7ton/h	10hp	1070mm	2200mm	3013mm

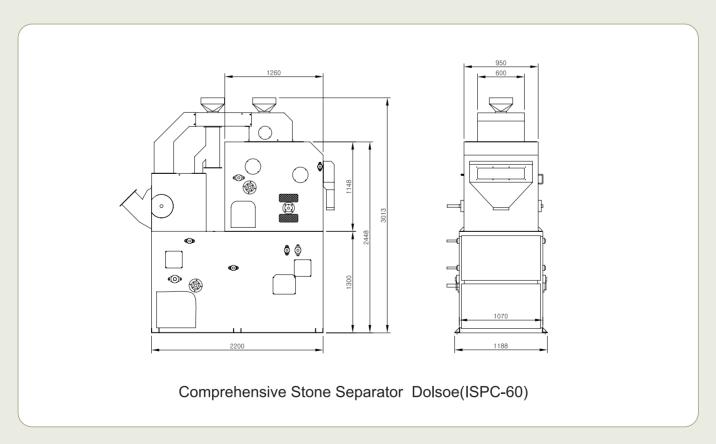

Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Superior device for separating husk

HUSK SEPARATOR





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Superior device for separating husk









Model	Capacity	Speed	Width	Length	Height
Husk Separator(Large)	3.5ton/h	1250~1400RPM	981mm	1409mm	1360mm
Husk Separator(Small)	2.5ton/h	1250~1400RPM	911mm	1198mm	1133mm

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Superior device for collecting rice bran and dusts

TURBOFAN



Power: 3 Phase 20HP(15KW) (dust collection)



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Superior device for collecting rice bran and dusts









SPECIFICATIONS

Power	Wind force	Wind pressure	Speed	Fan NO.	Application
20HP, 15KW	200M ³ /MIN	230MMAQ	1750R.P.M.	#4.5	Collecting bran, dust
15HP, 11KW	180M ³ /MIN	200MMAQ	2000R.P.M.	#4	Collecting bran, dust
10HP, 7.5KW	180M ³ /MIN	180MMAQ	1750R.P.M.	#4	Collecting bran, dust
7.5HP, 5.5KW	160M ³ /MIN	180MMAQ	1750R.P.M.	#3.5	Collecting bran, dust
10HP, 7.5KW	160M ³ /MIN	200MMAQ	2040R.P.M.	#3.5	Collecting bran, dust
7.5HP, 5.5KW	140M ³ /MIN	180MMAQ	2040R.P.M.	#3.5	Collecting bran, dust

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

PADDY SEPARATOR

(Large 7-layer)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAETWA INDUSTRIAL MACHINERY CO., LTD.





FEATURES

1. Excellent screening rate

Brown rice and paddy rice are separating through the method of gravity and coefficient of friction.

2. Easy observation on separating process

Separating process on the screening board can be observed at a glance.

3. Superior durability

Special bearings sealed up with lubricating grease applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.

SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Paddy separator Large 7-layer	3.5~4ton/h	2hp	1,830mm	1,550mm	2,010mm
Paddy separator Large 5-layer	3.0ton/h	2hp	1,830mm	1,550mm	1,900mm
Paddy separator Middle 4-layer(Auto)	2.5ton/h	1hp	1,800mm	1,140mm	1,750mm
Paddy separator Middle 3-layer(Auto)	2.0ton/h	0.5hp	1,800mm	1,140mm	1,680mm

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

PADDY SEPARATOR

ISPS-35



Model: ISPS-35 Capacity: 3.5-4ton/h



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing


FEATURES

- 1. Compact size doesn't require large space.
- 2. Separate input into each screening board prevents clogging, and increases accurate separation.
- 3. Using a special screening board enhances separation capacity and prevents debris from sticking to the screening board, which does not require frequent cleaning.
- 4. The angle of the screening board can be adjusted during operation.
- 5. Precise separation can minimize the chance of returning unpolished rice, and increase yield rate, which extends the life of the machine.
- 6. Automatic stopping device increases operators' convenience. (Optional)



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	비고
Paddy Separator ISPS-35	3.5~4ton/h	2hp	2040mm	1320mm	1855mm	14-layer
Paddy Separator ISPS-30	3~3.5ton/h	2hp	1881mm	1320mm	1790mm	12-layer
Paddy Separator ISPS-25	2.5~3ton/h	2hp	1858mm	1320mm	1725mm	10-layer

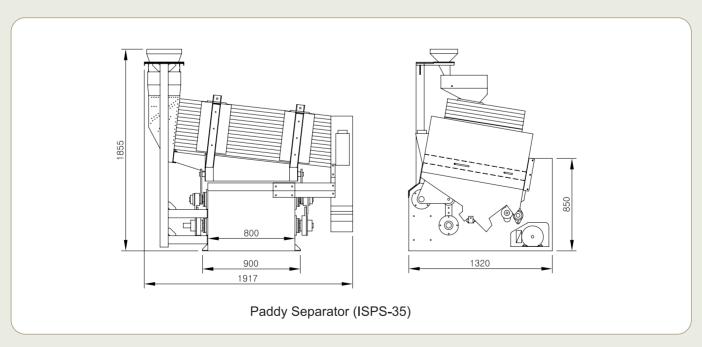



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

• Specifications are subject to change without notice for better performance.

Definitive solution for eliminating broken rice and green-kerneled rice

BROKEN RICE SEPARATOR

(Swaedori)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

Swaedori completely eliminates broken rice and green-kerneled rice

FEATURES

1. Excellent screening rate

2. 2-step screening method

Swaedori is ideal for the primary cleaning. On the first step, straw, PP-threads, bran are eliminated, and the second, green kerneled rice and broken rice.

3. Easy to alternate the screen

Flexible using of the screens makes it easy to separate all sizes of broken rice.

4. Free from mechanical trouble

Special bearings sealed up with lubricating grease are applied to all rotating parts allow users to leave them with no oiling for a long time, and to be free from concerns about malfunction, noise and vibration.


5. Built-in screen cleaning ball

Silicon cleaning ball inserted automatically maintains the cleanliness of the screen.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height	Weight
Broken Rice Separator Swaedori	3.5ton/h	0.5hp	1041mm	1426mm	1382mm	350kg

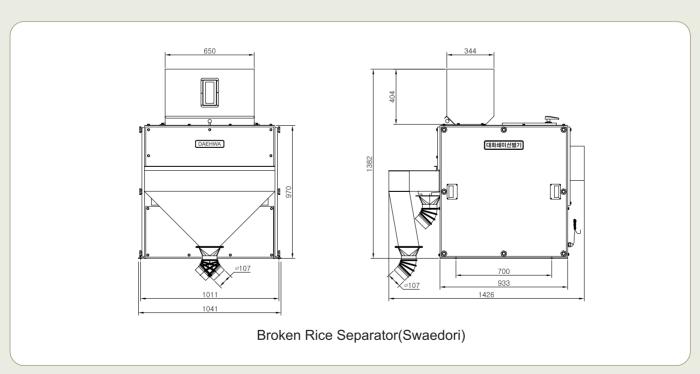



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

• Specifications are subject to change without notice for better performance.

Definitive solution for eliminating broken rice and green-kerneled rice

GREEN-KERNELED RICE SEPARATOR

(SS30)



SS30 completely eliminates broken rice and green-kerneled rice


FEATURES


- 1. Excellent screening rate
- 2. Slow-roll discharge avoids shock to grain.
- 3. Completely eliminates broken rice and green kerneled rice.
- 4. Easy to alternate the screen
 Flexible using of the screens makes it
 easy to separate all sizes of broken rice.
- 5. Free from mechanical trouble
 Special bearings sealed up with lubricating
 grease applied to all rotating parts allow
 users to leave them with no oiling for a long
 time, and to be free from concerns about
 malfunction, noise and vibration.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Green-kerneled Rice Separator(SS30)	3.0ton/h	3hp	480mm	1360mm	1350mm
Green-kerneled Rice Separator(SS60)	6.0ton/h	5hp	667mm	1399mm	1450mm





Green-Kerneled Rice Separator (SS30)

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for eliminating broken rice and green-kerneled rice

BROKEN RICE SEPARATOR

(Middle)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Broken rice separator completely eliminates broken rice and green-kerneled rice


FEATURES

- 1. Slow-roll discharge avoids shock to the rice.
- 2. Superior screening capacity to the one with punched sieve.
- 3. Screen with a mesh space of 0.05mm can screen any size of grain.
- 4. Low speed revolution of 48-50 r.p.m ensures long durability.
- 5. Specially designed brush increases efficiency, and prevents grain from being caught.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Broken Rice Separator(Middle)	3ton/h	0.5hp	1415mm	984mm	1080mm

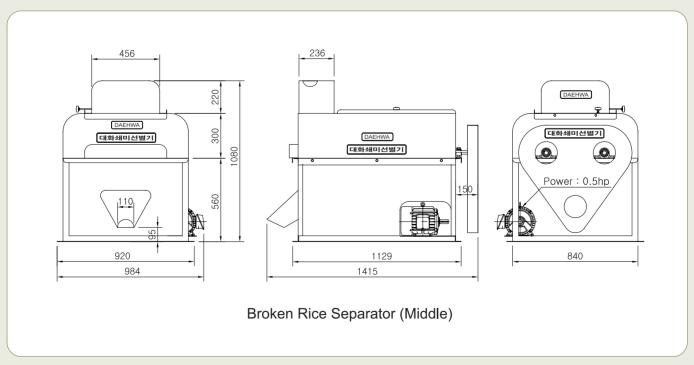




Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

• Specifications are subject to change without notice for better performance.

Definitive solution for eliminating broken rice and green-kerneled rice

THICKNESS GRADER

(Middle)

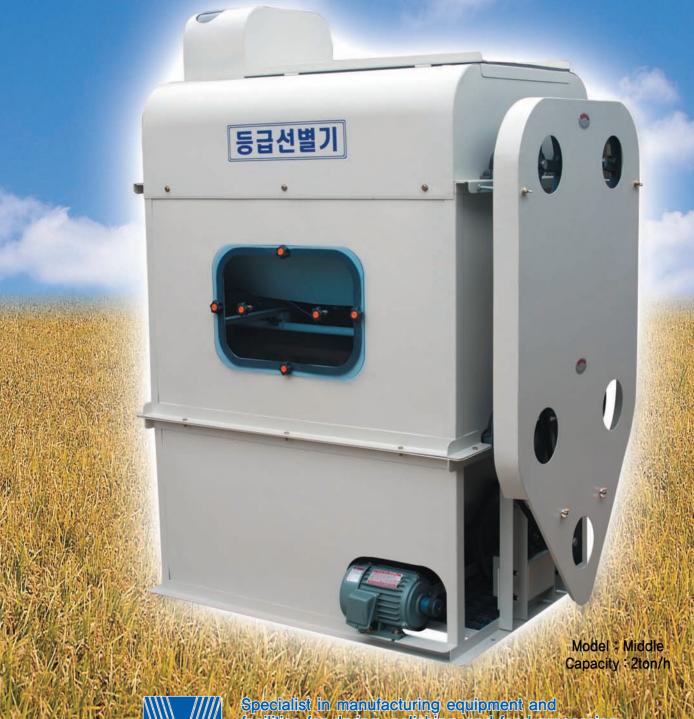

Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Thickness grader completely eliminates broken rice and green kerneled rice


FEATURES

- 1. Slow-roll discharge avoids shock to grain.
- 2. Superior screening capacity to the one with punched sieve.
- 3. Screen with a mesh gap of 0.05mm can screen all sizes of grain.
- 4. Low speed revolution of 48-50 R.P.M. ensures long durability.
- 5. Specially designed brush increases efficiency, and prevents grain from being caught.



SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Thickness Grader(Middle)	2ton/h	1hp	1435mm	984mm	1780mm

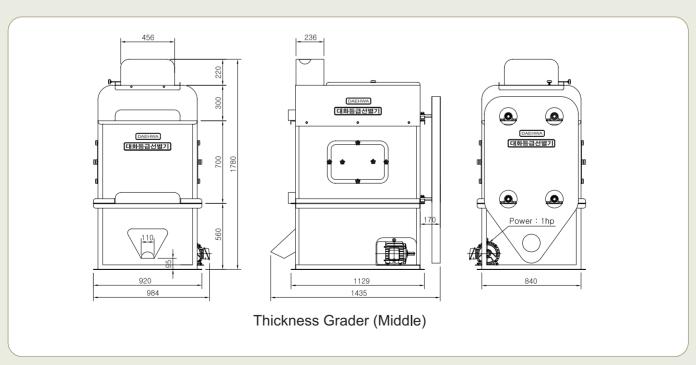




Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

• Specifications are subject to change without notice for better performance.

Definitive solution for eliminating broken rice and green-kerneled rice

VIBRATORY SEPARATOR

(Middle)

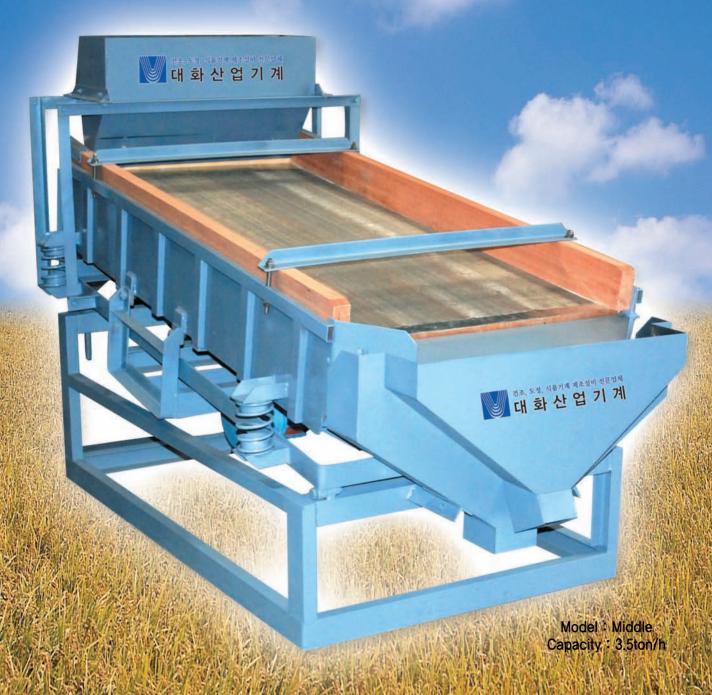



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAELWA INDUSTRIAL MACHINERY CO., LTD.

Vibratory separator completely eliminates broken rice and green-kerneled rice

FEATURES

1. Excellent screening rate

Vibratory separator is by far the best among its competitors in terms of screening small stones, metals, glasses and other foreign objects.

2. 2-step screening method


Vibratory separator is ideal for the primary cleaning. On the first step, straw, PP-threads, bran are eliminated, and the second, green-kerneled rice and broken rice.

3. Easy to alternate the screen

Flexible using of the screens makes it easy to separate all sizes of broken rice.


4. Free from mechanical trouble

Vibratory separator is operated by a vibrating motor, so it is free from mechanical trouble, noise, and vibration.

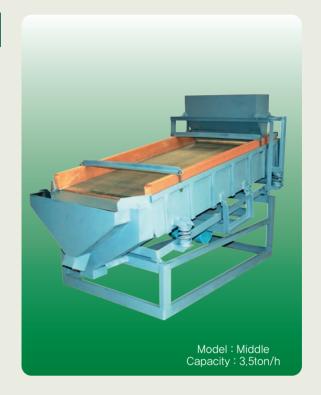

SPECIFICATIONS

Model	Capacity	Power	Width	Length	Height
Vibratory Separator(Middle)	3.5ton/h	0.5hp	2148mm	1150mm	1457mm

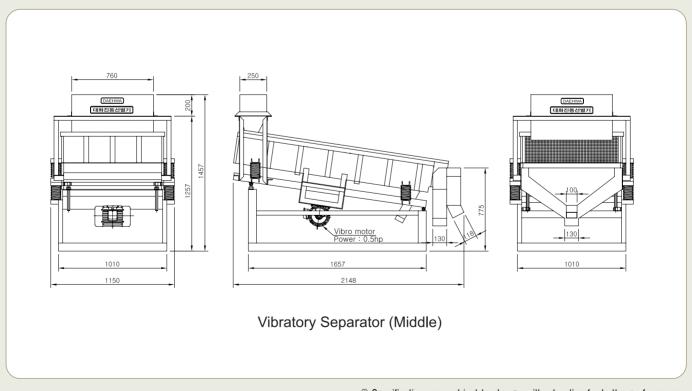

Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Master of screening raw materials

PRE-CLEANER

(SCS4019)





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Master of separating sand, smut, straws and empty heads of grain


FEATURES


- 1. Capable of processing large quantity regardless of the types of mixture or moisture.
- 2. Requires small space to set it up
- 3. Segments the separating process into 3 steps
- 4. Simplified replacement of the screen
- 5. Maximized yield through removing smut and dusts
- 6. Maximized efficiency (Excellent screening performance)
- 7. Specially designed to eliminate vibration and noise as well as to perform excellent aspiration
- 8. Three-step-aspiration device
- 9. Built-in scraper to clean up straws



SPECIFICATIONS

Model	Capacity(t/h)	Power(HP)	Width	Length	Height
Pre-Cleaner SCS4019	20ton/h(with 24% of moisture)	2hp, 1/2hp, 1/4hp	2640mm	1950mm	2590mm





Pre Cleaner (SS4019)

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Superior husking ratio

RICE HULLER

MJH-SBCA





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Quick and easy roll replacement system


FEATURES


- 1. Superior husking ratio
- 2. Increased rubber roll life
- 3. Quick and easy roll replacement system
- 4. Pneumatic control system (MJH-SBCA, MJH-SA)



SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed(R.P.M)	Power	Capacity
MJH-1B	815mm	665mm	615mm	130Kg	1250	5Hp	2.4ton/h
MJH-SB	920mm	760mm	776mm	230Kg	1250	7.5Hp	3.0ton/h
MJH-SBCA	800mm	760mm	900mm	250Kg	1250	7.5Hp	3~3.5ton/h
MJH-SA	1120mm	665mm	1070mm	500Kg	1250	10Hp	3.5~4.0ton/h





Rice Huller (MJH-SBCA)

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.com

RICE HULLER - RICE POLISHER



■ Rice Huller

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
				-	1100-1200 1100-1200		



■ Rice Polisher

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
	995mm 1065mm						



■ Rice Polisher

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
BCP-3500	1220mm	530mm	600mm	210kg	750-800	20hp/set	3-3.5/4pass

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

BARLEY POLISHER - RICE POLISHER



■ Barley Polisher


SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
KBP-3000	850mm	410mm	620mm	120Kg	1400-1500	30hp/set	3/10pass

■ Rice Polisher

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
MK-800	1120mm	305mm	580mm	120Kg	900	10hp/set	2.5/4pass





Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com


RICE HULLER POLISHER (SHINER)



■ Rice Huller

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
HLG-300	888mm	657mm	450mm	180Kg	1100-1200	10hp	2.5-3



■ Automatic Rice Huller

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
HLBA-300	830mm	650mm	638mm	230kg	1100-1200	15hp	3-3.5



■ Rice Polisher(Shiner)

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
KR-3000	1370mm	722mm	1440mm	380kg	950-1000	30hp	2-2.5

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

RICE POLISHER



■ Rice Polisher

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
PS-100	1072mm	295mm	575mm	110Kg	950-1000	7.5hp/set	1.5-2/4 pass



■ Rice Polisher

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
PM-200	1085mm	295mm	580mm	120kg	950-1000	10hp/set	2-2.5/4 pass



■ Rice Polisher

SPECIFICATIONS

Model	Length	Width	Height	Weight	Speed (R.P.M)	Power	Capacity (ton/h)
PL-400	1175mm	295mm	580mm	195kg	950-1000	15hp	2.5-3.3/4 pass

• Specifications are subject to change without notice for better performance.



Definitive solution for processing and producing clean rice

DAEHWA RICE POLISHER (SHINER)

BCPWJ-2400



Model: BCPWJ-2400 Capacity: 2-2.6ton/h



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing

DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Definitive resolution for processing and producing clean rice Daehwa Rice Polisher(Shiner)



FEATURES

Micro-quantity adjustment

Daehwa Rice Polisher supplies the same amount of water constantly due to the precise micro-quantity adjustment function, so desired quality of rice is produced.

Perfect frost protection

Flexibly adjustable water temperature function prevents the water tank and the nozzles from frozen burst.

Parts with long durability

Quality materials are used for the main parts and auto-controlling high pressure pumps are operated by the close examination of sensors throughout the whole process, which allows easy-to-use operation and long durability

Convenient device

Automatic control operations provide superior convenience and safety.

Producing grain with crystal-clear

Daehwa Rice Polisher processes the surface of grains like glittering crystal, so that the quality and the shelf life of rice may be enhanced.

SPECIFICATIONS

Model	Power(hp)	Speed(R.P.M)	Capacity(ton/h)	Dimension (W×L×H)
BCPWJ-2400	30	950	2-2.6	930×1330×1820

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

MIDAS PLUS SERIES

COLOR SORTER



Model: MidasPlus-6



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

MIDAS PLUS SERIES

FEATURES



1. REALIZATION OF FULL AUTOMATION SYSTEM

- -Easily acessible DIGITAL LCD TOUCH SCREEN with MICRO-PROCESSOR had been equipped.
- -MULTI-SORTER FUNCTION had been adopted which provides automatic separation of raw material by the automatic color adjustment system.



2. THE BEST SUITED CHUTES

- -Custom-Made Chutes will be provided depending on the characteristics of raw materials of the user.
- -The surface of the chute is specially coated and heater attached to less the dispersion of raw material regardless of surrounding temperatures that could possibly occur by the friction when the raw material sides down. This special chute will definitely maximize the productivity and will increase the profit of the user.



3. Application of a NEW Concept of Light Source (LED)

This is another pride of us and is newly introduced to the world by us only.

For the MIDAS PLUS SERIES, a sensationally advanced light resource has been applied which is called LED(Light Emitting Diode)light source. It will provide:

- 1) Satisfactory sorting result by stable intensity of illumination
- 2) Over 50,000 hours(Semi-permanent) of life period(No need to replace them periodically like the existing types-ex:fluorescent lamps)
- 3) Realization of various light colors
- 4) Free from the affects of the surrounding temperatures that used to cause the trouble of light brightness

SPECIFICATIONS

Model	Channels	Power	(AC220V50/60Hz)	Capacity	Dimension(m		(mm)
Model	Channels	Main(max)	Compressor	ton/h	Length	Width	Height
MidasPlus-8	208Ch(144:64)	5.0Kw	22Kw(30hp)	9.0	2000	1270	1740
MidasPlus-7	176Ch(128:48)	4.5Kw	18.8Kw(25hp)	7.0	2000	1270	1740
MidasPlus-6	114Ch(96:48)	3.5Kw	15Kw(20hp)	6.0	1700	1270	1740
MidasPlus-5	112Ch(80:32)	3.5Kw	15Kw(20hp)	4.0	1400	1270	1740
MidasPlus-4	96Ch(64:32)	2.5Kw	11.3Kw(15hp)	3.5	1400	1270	1740
MidasPlus-3	64Ch(48:16)	2.0Kw	7.5Kw(10hp)	2.0	1100	1270	1740
MidasPlus-2	48Ch(32:16)	1.7Kw	5.25Kw(10hp)	1.5	830	1270	1740

^{*}Above specification may be changed for the improvement of the product performance without any prior natice.

^{*}Air compressor is not included with the machine.




^{*}The product volume(capacity) might be differ according to the kind of raw material and mixed ratio of discolored rice.

Color Sorter with CCD sensor and digital camera

COLOR SORTER

BCS128

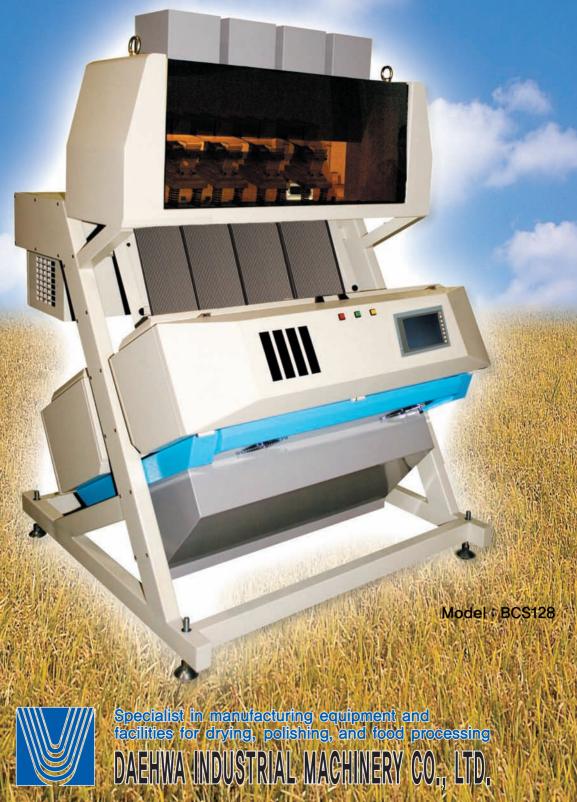

Color Sorter with a CCD sensor and a digital camera

FEATURES

- 1. Adopting high-sensitive sensor, Color sorter senses even the finest materials.
- 2. Ultra high-speed ejector made by special material screens fine color particles without missing.
- 3. Color sorter is easy to operate because it is controlled via a touch screen, and the whole process is graphically displayed.
- 4. Color sorter provides dozens of programed modes in which preferable ones picked depending on objects.



SPECIFICATIONS

Model	Channels	Power	(AC220V50/60Hz)	Capacity	Dim	Dimension(mm)		
Wiodei	Charmeis	Main(max)	Compressor	ton/h	Length	Width	Height	
BCS 128	128CH(96CH:32CH)	4.8Kw	15Kw(20hp)	2.5~5.5	1350	940	1650	
BCS 160	160CH(128CH:32CH)	5.8Kw	15Kw(20hp)	3.0~6.5	1350	940	1650	
BCS 192	192CH(160CH:32CH)	7.3Kw	22Kw(30hp)	3.5~7.5	1650	940	1650	
BCS 224	224CH(160CH:64CH)	8.3Kw	22Kw(30hp)	4.0~8.5	1650	940	1650	
BCS 256	256CH(192CH:64CH)	9.8Kw	22Kw(30hp)	4.5~9.5	1650	940	1650	

voltage: AC220V

Screening examples



Specifications are subject to change without notice for better performance,

cialist in manufacturing equipment and



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Color sorter with highly sensitive photocells

COLOR SORTER

MGP070



Model: MGP070



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAETWA INDUSTRIAL MACHINERY CO., LTD.

Color Sorter with highly sensitive photocells

FEATURES

- 1. Highly sensitive photocells are attached to two sides, so they can completely sense even the finest materials.
- 2. Ultra high-speed ejector made by special materials can screen fine color particles without missing.
- 3. High-performance digital chip to control circuit enhances performance and improves durability.
- 4. Adopting micro-computer control mode, MGP has the feature of self-diagnosis and user-friendly operation.
- 5. Operating status is displayed in both English and Korean.
- 6. MGP provides dozens of programed modes in which preferable ones picked depending on objects.



SPECIFICATIONS

Model	Channels	Power	(AC220V50/60Hz)	Capacity	Dim	nension(mm)
WOUGI	Chamileis	Main(max)	Compressor	ton/h	Length	Width	Height
MGP 010	10CH(10CH:nothing)	1.5	1.5Kw(2hp)	0.4~0.8	390	940	1650
MGP 030	30CH(20CH:10CH)	2.5	2.3Kw(3hp)	0.8~1.6	730	940	1650
MGP 050	50CH(30CH:20CH)	2.8	3.75Kw(5hp)	1.2~2.4	1045	940	1650
MGP 070	70CH(50CH:20CH)	3.4	5.7Kw(7.5hp)	2.0~4.0	1350	940	1650
MGP 090	90CH(60CH:30CH)	4.5	11.3Kw(15hp)	2.4~5.2	1650	940	1650
MGP 110	110CH(80CH:30CH)	5.5	15Kw(20hp)	3.2~6.4	1650	940	1650

voltage: AC220V

Screening examples



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

The first color sorter for beans in Korea

COLOR SORTER


MPS70DW



The first color sorter for beans in Korea

FEATURES

- 1. Grain is conveyed on a belt without being broken or cracked.
- 2. Grain is conveyed at the same speed so even the fine color particles are screened without missing.
- 3. Special screening technology are installed that scraps, stones and immature beans sorts out with out missing.
- 4. Hulls and small dusts are effectively eliminated.
- 5. The rotating speed of the engine is automatically adjusted depending on the shapes of grain.
- 6. Operation mode is easily selected depending on the type of grain.

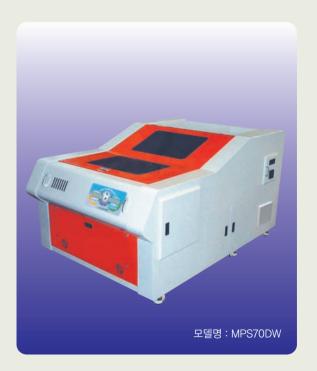

SPECIFICATIONS

Model	Channels	Power	(AC220V50/60Hz)	Capacity	Dimension(mn		(mm)
Wiodei	Channels	Main(max)	Compressor	ton/h	Length	Width	Height
MPS 30DW	30CH(20CH:10CH)	2.8	2.3Kw(3hp)	0.8~1.2	1000	2425	1200
MPS 50DW	50CH(40CH:10CH)	4.2	3.75Kw(5hp)	1.0~2.2	1250	2425	1200
MPS 70DW	70CH(50CH:20CH)	5.5	5.7Kw(7.5hp)	1.2~3.2	1500	2425	1200

voltage: AC220V

Screening examples



Product function

 Separating the immature beans, broken beans, bad beans and stones from soybeans, black beans and red beans.

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for weighing materials

AUTOMATIC WEIGHING MACHINE

HK-2000(Double-gate type)



Model: HK-2000 (Double-gate type)



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAELWA INDUSTRIAL MACHINERY CO., LTD.


HK-2000(Double-gate type) Completely eliminates errors caused by auto-measurement

FEATURES

- 1. Equiped with a special control unit for measurement, HK-2000 is operated by single-touch system. Information is displayed in the load-cell method.
- 2. Speed control device is operated, using the air-cylinder method.
- 3. There are three steps in the whole process of measuring the amount of rice. HK-2000 supplies rice with large, medium, and small quantity depending on the desired amount, which allows the precise measurement and speed/force adjustment.



Type Model	HK-1000(Single)	HK-2000(Double)	HK-3000(Triple)
Measuring range of packing	1kg~20kg	1kg~20kg	1kg~40kg
Measurement output	5∼6bags/min	10∼14bags/min	8~12bags/min
Measuring accuracy	±5~10g	±5~10g	±5~10g
Measuring way	Air-cylinder mode	Air-cylinder mode	Air-cylinder mode
Voltage	AC 220V	AC 220V	AC 220V

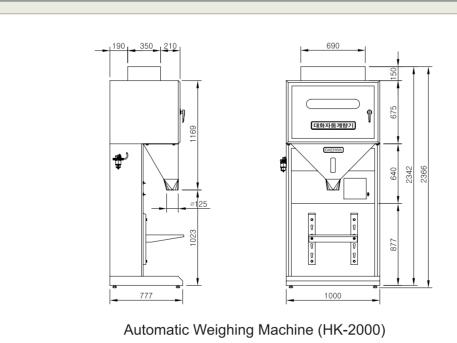

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for weighing materials

AUTOMATIC WEIGHING MACHINE

DP-2(Double-gate type)



Model: DP-2



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAEHWA INDUSTRIAL MACHINERY CO., LTD.

DP-2 completely eliminates errors caused by auto-measurement and packing


FEATURES

- 1. DP-2 is able to measure a variety of sort of grain.
- 2. Interactive computer system increases users' convenience.
- 3. Various selection modes are installed for better convenience.
- 4. Three streamlining control system provides large, medium, and small quantity modes.
- 5. System recovery and data protection functions are provided.
- 6. Users are able to measure: rice, miscellaneous cereals, corns, medicine and other articles.



SPECIFICATIONS

Model	Measuring speed	Measuring range of packing	Minimum scale	Dimension
DP-1	Appx 300 bags/hour	4kg~20kg	2g~10g	550×710×1850
DP-2	Appx 600 bags/hour	4kg~20kg	2g~10g	550×710×1850
DP-3	Appx 600 bags/hour	4kg~40kg	2g~10g	550×710×1850

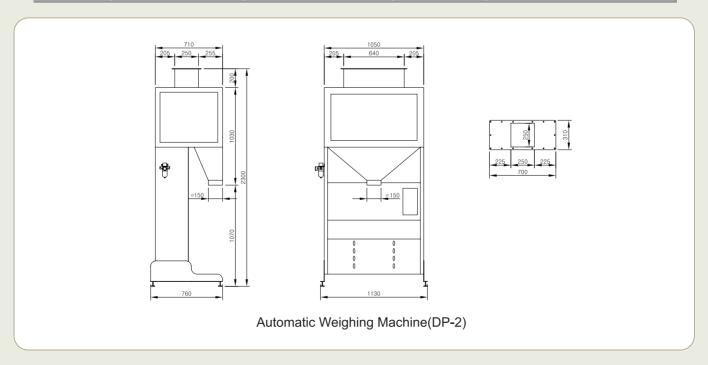

• Specifications are subject to change without notice for better performance.




Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel:+82-42-931-0609 / Fax:+82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for auto measuring and packing

AUTO MEASURING/PACKING MACHINE

DPS-1

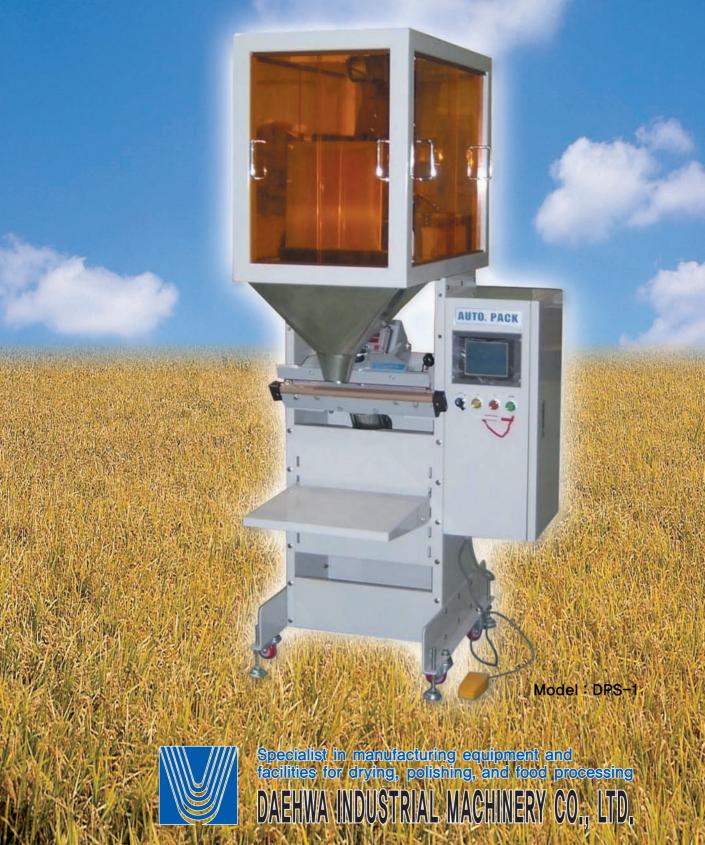

DPS-1 completely eliminates errors caused by auto-measurement and packing


FEATURES

- 1. DPS-1 is able to measure a variety of sort of grain.
- 2. Interactive computer system increases users' convenience.
- 3. Various selection modes are installed for better convenience.
- 4. Three streamlining control system provides large, medium, and small quantity modes.
- 5. System recovery and data protection functions are provided.
- 6. Users are able to measure: rice, miscellaneous cereals, corns, medicine and other articles.



SPECIFICATIONS

Model	Measuring speed	Measuring range of packing	Minimum scale	Dimension
DPS-1	Appx 300 bags/hour	50g~5kg	1g~2g	550×860×2100
DPS-2	Appx 700~800 bags/hour	50g~5kg	1g~2g	860×860×2200
DPS-3	Appx 1000 bags/hour	50g~5kg	1g~2g	1010×860×2300

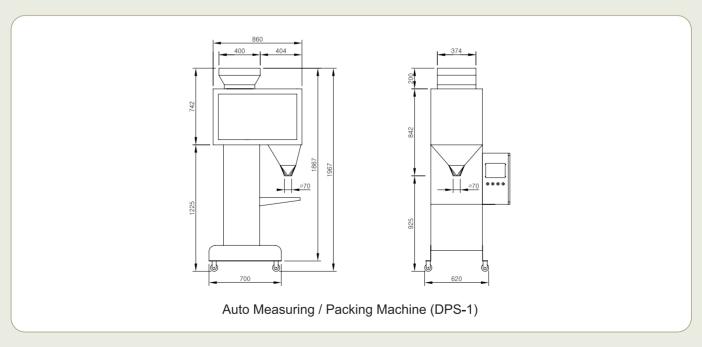

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for automatic measuring and packing

AUTO MEASURING/PACKING MACHINE

(DPS-1) & Vacuum-transfer device



DPS-1 completely eliminates errors caused by auto-measurement and packing


FEATURES

- 1. DPS-1 is able to measure a variety of sort of grain.
- 2. Interactive computer system increases users' convenience.
- 3. Various selection modes are installed for better convenience.
- 4. Three streamlining control system provides large, medium, and small quantity modes.
- 5. System recovery and data protection functions are provided.
- 6. Users are able to measure: rice, miscellaneous cereals, corns, medicine and other articles.



SPECIFICATIONS

Model	Measuring speed	Measuring range of packing	Minimum scale	Dimension
DPS-1	Appx 300 bags/hour	50g~5kg	1g~2g	550×860×2100
DPS-2	Appx 700~800 bags/hour	50g~5kg	1g~2g	860×860×2200
DPS-3	Appx 1000 bags/hour	50g~5kg	1g~2g	1010×860×2300

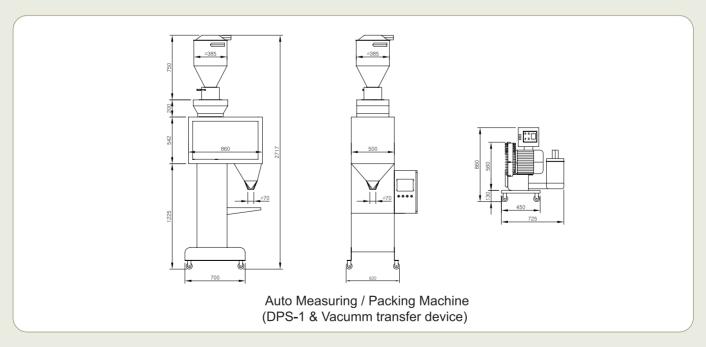

• Specifications are subject to change without notice for better performance.




Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for auto measuring and packing

AUTO MEASURING/PACKING MACHINE

DPS-2(Double-gate type)

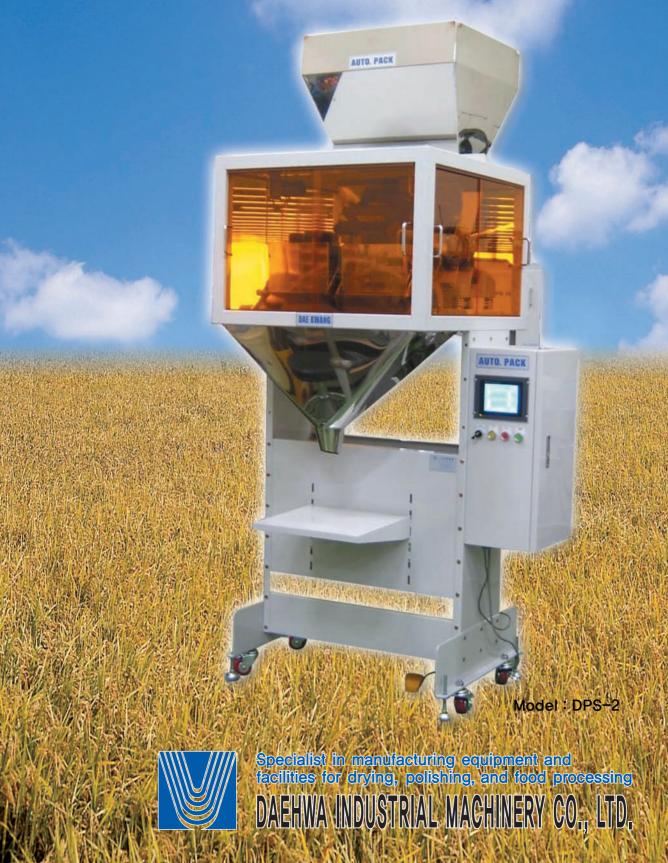

DPS-2 completely eliminates errors caused by auto-measurement and packing


FEATURES

- 1. DPS-1 is able to measure a variety of sort of grain.
- 2. Interactive computer system increases users' convenience.
- 3. Various selection modes are installed for better convenience.
- 4. Three streamlining control system provides large, medium, and small quantity modes.
- 5. System recovery and data protection functions are provided.
- 6. Users are able to measure: rice, miscellaneous cereals, corns, medicine and other articles.



SPECIFICATIONS

Model	Measuring speed	Measuring range of packing	Minimum scale	Dimension
DPS-1	Appx 300 bags/hour	50g~5kg	1g~2g	550×860×2100
DPS-2	Appx 700~800 bags/hour	50g~5kg	1g~2g	860×860×2200
DPS-3	Appx 1000 bags/hour	50g~5kg	1g~2g	1010×860×2300

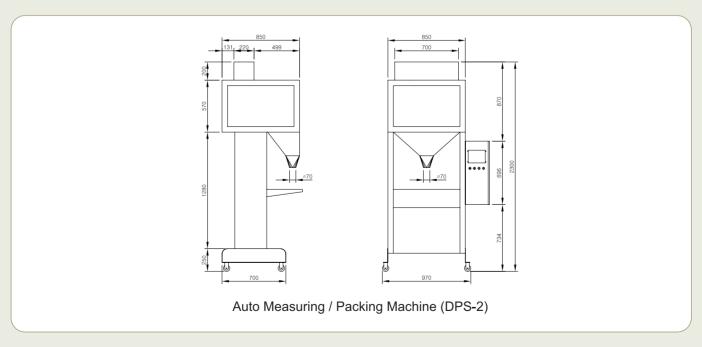

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for auto measuring and packing

AUTOMATIC WEIGHING/PACKING MACHINE

SJ-200A-1





Specialist in manufacturing equipment and facilities for drying, polishing, and food processing DAELWA INDUSTRIAL MACHINERY CO., LTD.

SJ-200A-1 completely eliminates errors caused by auto-measurement and packing

FEATURES

- 1. Touch screen allows even a novice to operate it with ease.
- 2. For converting the 10kg system to the 20kg, the whole system of scales converts within one second.
- 3. The upper part of a paper bag is sewed without cuting, which allows tidy packing.
- 4. The maximum output speed is 650bags/hour.
- 5. Desired amount of packing can be set before processing. When the desired amount is processed, SJ-200A-1 automatically stops.
- 6. Automatic measurement indicator is installed for ultra-precise measurement.
- 7. SJ-200A-1 includes many detection devices: if no bag is left, a bag is placed in a wrong way, or a bag is closed, SJ-200A-1 blows out the bag, or turns the emergency stop device to be in action.









Model	SJ-2001-1
Capacity	500-600 bag/hr
Measuring way	Three-stage control
Measuring range of packing(kg)	8, 10, 20, 25
Air compressor	15hp(11kw)Optional
Voltage	220~380V 6.0kw
Object materials	Rice, fertilizers and feeding stuff

• Specifications are subject to change without notice for better performance.



Specialist in manufacturing equipment and facilities for drying, polishing, and food processing


DAEHWA INDUSTRIAL MACHINERY CO., LTD.

Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for automatic sewing

AUTOMATIC SEWING MACHINE

SJ-50A-1

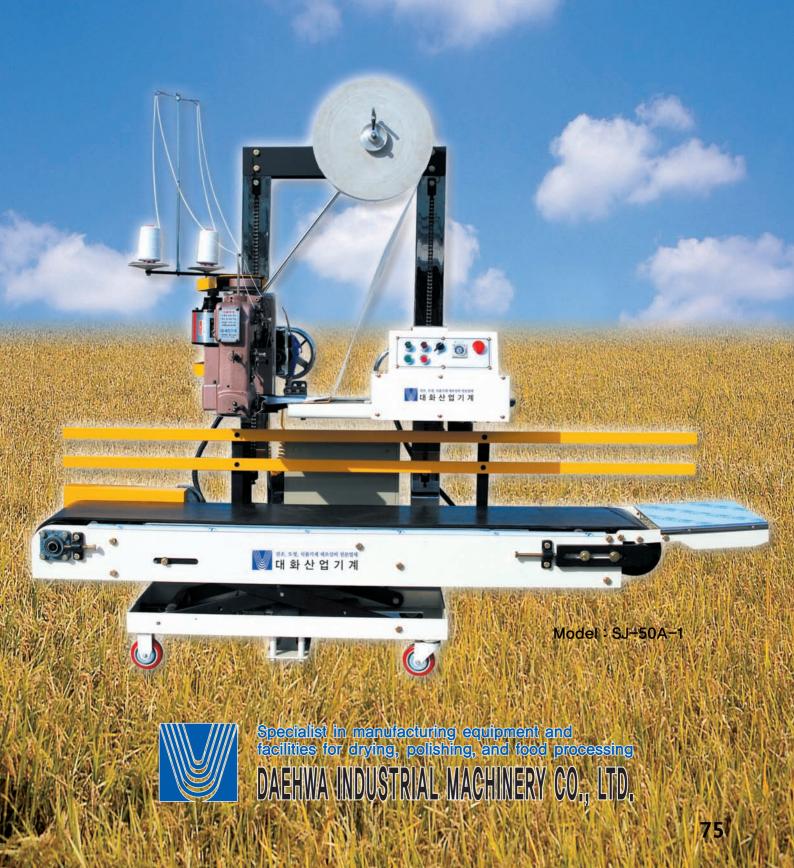

SJ-50A-1 completely eliminates defective sewing after measurement



FEATURES

- 1. SJ-50A-1 complements the shortcomings of the existing sewing machine. SJ-50A-1 requires only one operator to sew a bag of 10-20kg, so even a novice can operate it.
- 2. The seal of main operating parts is airtight, so SJ-50A-1 is free from contamination and dusts.
- 3. SJ-50A-1 starts and stops itself, and automatically cuts adhesive tapes and sewing threads.
- 4. The conveyor of the sewing machine is adjusted automatically, so the conversion of packing units (10kg~20kg) can be done promptly.

Capacity	350~400bag/hr
Stitch	7~12mm
Voltage	220~380V 1.5kw
Dimension(mm)	1600×2300×650

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for automatic sewing

AUTOMATIC SEWING MACHINE

SJ-50A



SJ-50A completely eliminates defective sewing after measurement



FEATURES

- 1. SJ-50A complements the shortcomings of the existing sewing machine. SJ-50A requires only one operator to sew a bag of 10-20kg, so even a novice can operate it.
- 2. The seal of main operating parts is airtight, so SJ-50A is free from contamination and dusts.
- 3. SJ-50A starts and stops itself, and automatically cuts adhesive tapes and sewing threads.

Capacity	350~400bag/hr
Stitch	7~12mm
Voltage	220~380V 1.5kw
Dimension(mm)	1600×2300×650

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com

Definitive solution for automatic sewing

AUTOMATIC SEWING MACHINE

SJ-DS-6B



SJ-DS-6B completely eliminates defective sewing after measurement



FEATURES

- 1. SJ-DS-6B complements the shortcomings of the existing sewing machine dramatically. SJ-DS-6B requires only one operator to sew a rice bag of 10-20kg, so even a novice is able to operate it.
- 2. The seal of main operating parts is airtight, so SJ-DS-6B is free from contamination and dusts.
- 3. SJ-DS-6B starts and stops itself, and automatically cuts adhesive tapes and sewing threads.

Capacity	600~700bag/hr
Stitch	7~12mm
Voltage	220~380V 1kw
Dimension(mm)	1600×2300×650

• Specifications are subject to change without notice for better performance.



Factory:18-8, Deogam-dong, Daedeok-gu, Daejeon, Korea Tel: +82-42-931-0609 / Fax: +82-42-931-6609 http://www.daehwamc.kr http://www.daehwamc.com



